



Eco-profile of grey and white
Expandable Polystyrene (EPS)
November 2022

TABLE OF CONTENT

1	Summary.....	4
1.1	Meta Data.....	4
1.2	Description of the Product and the Production Process	5
1.3	Data Sources and Allocation.....	5
1.4	Environmental Performance.....	6
	Input Parameters	6
	Output Parameters	7
1.5	Programme Owner	7
1.6	Data Owner.....	7
1.7	LCA practitioner	7
1.8	Reviewer	8
2	Eco-profile Report.....	9
2.1	Functional Unit and Declared Unit	9
2.2	Product Description	9
2.3	Manufacturing Description.....	9
2.4	Producer Description.....	10
2.5	System Boundaries	12
2.6	Technological Reference.....	12
2.7	Temporal Reference.....	13
2.8	Geographical Reference.....	13
2.9	Cut-off Rules.....	13
2.10	Data Quality Requirements	14
	Data Sources.....	14
	Relevance and Representativeness	14
	Consistency	14
	Reliability.....	14
	Completeness	15
	Precision and Accuracy	15
	Reproducibility.....	15
	Data Validation	15
	Life Cycle Model	15
2.11	Calculation Rules.....	16
	Vertical Averaging.....	16
	Allocation Rules	17

2.12	Life Cycle Inventory (LCI) Results.....	18
	Delivery and Formats of LCI Dataset	18
	Energy Demand	18
	Water cradle to gate Use and Consumption	19
	Water foreground (gate to gate) Use and Consumption.....	19
	Dominance Analysis.....	21
	Comparison of the present Eco-profile with its previous version	23
3	EF 3.0 indicator results	25
4	Review	26
4.1	Review Details.....	26
4.2	Review Statement.....	26
5	References.....	28

1 SUMMARY

This Eco-profile has been prepared according to **Eco-profiles program and methodology – PlasticsEurope – V3.1 (2022)**.

It provides environmental performance data representative of the average European production of Expandable Polystyrene (EPS), from cradle to gate (from crude oil extraction to beads production).

Please keep in mind that comparisons cannot be made on the level of the polymer material alone: it is necessary to consider the full life cycle of an application in order to compare the performance of different materials and the effects of relevant life cycle parameters. It is intended to be used by member companies, to support product-orientated environmental management; by users of plastics, as a building block of life cycle assessment (LCA) studies of individual products; and by other interested parties, as a source of life cycle information.

1.1 META DATA

Data Owner	PlasticsEurope
LCA Practitioner	Sphera Solutions GmbH
Programme Owner	PlasticsEurope
Reviewer	Matthias Schulz, Schulz Sustainability Consulting, Germany
Number of plants included in data collection	<ul style="list-style-type: none">• 4 plants for grey EPS• 15 plants for white EPS
Representativeness	Primary data collected which represent about 77% of the production capacity in 2021. It has been assumed that the production capacity of 2021 is also representative of 2019.
Reference year	2019
Year of data collection and calculation	2022
Expected temporal validity	Revision should be considered in 2027
Cut-offs	No cut-offs applied
Data Quality	Overall: Excellent Confirmed by assessment of individual DQ indicators
Allocation method	<ul style="list-style-type: none">• None

1.2 DESCRIPTION OF THE PRODUCT AND THE PRODUCTION PROCESS

This Eco-profile covers the production of grey and white expandable polystyrene (EPS) separately. These are polymers produced in the form of beads containing polystyrene, pentane as a blowing agent (up to 8 mass%) and possibly flame retardant. Grey EPS beads contain carbon for improved insulation properties.

Within Europe the production capacity of expanded polystyrene (EPS) in 2021 was valued at around 1,800 kilotonnes (Research and markets, 2022).

The main purpose of EPS beads is to be further processed into expanded polystyrene, a light-weight, rigid, insulating material used to make foam blocks and moulded parts.

The functional units and also reference flows of this study, to which all data and results given in this Eco-profile refer, are:

1 kg of grey expandable polystyrene (EPS), reflecting the weighted average of about 77% of European production capacities

1 kg of white expandable polystyrene (EPS), reflecting the weighted average of about 77% of European production capacities

Expandable Polystyrene (EPS) is produced by polymerisation of styrene monomer, a chain-growth reaction which is mostly initiated by free radical organic initiators. EPS beads are produced by suspension polymerisation, extrusion or mass pelletisation.

1.3 DATA SOURCES AND ALLOCATION

The main data source is a primary data collection from European producers of white and grey EPS beads, providing site-specific gate-to-gate production data for processes under operational control of the participating companies: nine white EPS beads producers with fifteen plants in eleven different European countries; four grey EPS producers with four plants in four European countries.

The background data for all direct upstream inputs to the EPS system are taken from the GaBi 2021 LCI database (Sphera, 2021). With regards to styrene monomer (SM), the existing 60:40 mix of two different routes for the production of styrene (EBSM and POSM) has been taken from the Eco-Profile report of styrene (PlasticsEurope, 2022). The documentation for background data from GaBi is publicly available (Sphera, 2021).

There has been no allocation applied in the foreground data.

Use Phase and End-of-Life Management

Expandable polystyrene (EPS) is polystyrene that, when heated, forms a lightweight foam (due to an added blowing agent such as pentane) used for packaging and insulation purposes. EPS beads are foamed in order to manufacture lightweight industrial and food

packaging, insulation boards for construction, safety and sporting equipment, flotation devices, seed trays, geofoam etc. The building and construction sector is the main market and accounts for around 70% of the European EPS market. Polystyrene can be reused directly as new packaging, or ground for reuse as soil conditioner or in light concrete blocks; it can also be recycled in new PS-based products; furthermore, energy recovery by incineration is also possible for all types of EPS.

1.4 ENVIRONMENTAL PERFORMANCE

The tables below show the environmental performance indicators associated with the production of 1 kg EPS.

Input Parameters

Indicator	Unit	Value		Impact method ref.
		Grey EPS	White EPS	
Non-renewable energy resources ^{*)}		87.61	84.24	
<ul style="list-style-type: none">Fuel energy	MJ	45.41	41,84	-
<ul style="list-style-type: none">Feedstock energy	MJ	42.20	42.40	Gross calorific value
Renewable energy resources (biomass) ^{*)}		2.7	1.45	
<ul style="list-style-type: none">Fuel energy	MJ	2.70	1.45	-
<ul style="list-style-type: none">Feedstock energy	MJ	0.00	0.00	Gross calorific value
Resource use				
<ul style="list-style-type: none">Minerals and Metals	kg Sb eq	4.33E-07	5.44E-07	EF 3.0
<ul style="list-style-type: none">Energy Carriers	MJ	80.57	77.59	EF 3.0
Renewable materials (biomass)	kg	1.27E-14	-1.37E-14 ¹	-
Water use	m³ world eq	0.22	0.21	EF 3.0
^{*)} Calculated as upper heating value (UHV)				

¹ Neglectable negative result originating from a credit dataset used in upstream infrastructure modelling

Output Parameters

Indicator	Unit	Value		Impact method ref.
		Grey EPS	White EPS	
Climate change, total	kg CO ₂ eq.	2.62	2.28	EF 3.0
Ozone depletion	kg CFC-11 eq.	7.91E-15	3.20E-15	EF 3.0
Acidification	Mole of H ⁺ eq	4.34E-03	3.92E-03	EF 3.0
Photochemical ozone formation	kg NMVOC eq	4.89E-03	5.02E-03	EF 3.0
Eutrophication, freshwater	kg P eq	5.58E-06	8.19E-06	EF 3.0
Respiratory Inorganics	Disease incidences	3.22E-08	3.06E-08	EF 3.0
Waste				
• Non-hazardous	kg	2.11	0.84	-
• Hazardous	kg	5.17E-04	3.33E-04	-

1.5 PROGRAMME OWNER

PlasticsEurope

Rue Belliard 40

B-1040 Brussels, Belgium

E-mail: info@plasticseurope.org

For copies of this Report, for the underlying LCI data (Eco-profile); and for additional information, please refer to <http://www.plasticseurope.org/>.

1.6 DATA OWNER

PlasticsEurope

Rue Belliard 40

B-1040 Brussels, Belgium

E-mail: info@plasticseurope.org

1.7 LCA PRACTITIONER

Sphera Solutions GmbH

Hauptstraße 111-113

70771 Leinfelden-Echterdingen, Germany

Tel.: +49 711 3418170

1.8 REVIEWER

Matthias Schulz, Schulz Sustainability Consulting

Baldernstr. 2, D-70469 Stuttgart

E-mail: matthias@schulz-sustainability-consulting.de

2 ECO-PROFILE REPORT

2.1 FUNCTIONAL UNIT AND DECLARED UNIT

1 kg of grey unpacked Expandable Polystyrene (EPS) »at gate« (production site output) representing about 77% of the European industry production

or

1 kg of white unpacked Expandable Polystyrene (EPS) »at gate« (production site output) representing about 77% of the European industry production

2.2 PRODUCT DESCRIPTION

Expandable Polystyrene is a thermoplastic polymer, used - after expansion - in many applications such as lightweight industrial and food packaging, disposable cups, insulation boards for construction, safety and sporting equipment, flotation devices, seed trays, geofoam

White Expandable Polystyrene

IUPAC name: Poly(1-phenylethene)

CAS Number. 9003-53-6

Chemical formula $(C_8H_8)_n$

Gross calorific value ca. 42.4 MJ/kg

Grey Expandable Polystyrene

IUPAC name: Poly(1-phenylethene)

CAS no. 9003-53-6

Chemical formula $(C_8H_8)_n \times C$

Gross calorific value 41.9 – 42.4 MJ/kg (depending on carbon content)

2.3 MANUFACTURING DESCRIPTION

Expandable Polystyrene (EPS) is most commonly made using a suspension polymerisation process. Styrene charged with organic peroxide initiators is added to an aqueous phase and forms a suspension upon stirring. Polymeric flame retardant and carbon-rich material such as coke or graphite, as well as auxiliaries such as suspension stabilisers, chain transfer agents, expanding aids, nucleating agents and plasticisers can also be added.

The styrene droplets polymerise to polystyrene during heating of the reactor between 80 and 150°C. Blowing agent, typically pentane, is added to the reactor during polymerisation and dissolves in the polymer, producing the Expandable Polystyrene bead.

After the reactor is cooled, the polymer is separated from the water phase using a centrifuge. The EPS beads are dried and sieved into the required size fractions before being coated with additive, which aids the conversion process and final foam properties.

The EPS beads may also be produced by applying a melt process. In a first step styrene is polymerised to polystyrene. Afterwards pentane and other additives are mixed into the polystyrene melt; the final product is formed to beads in a pelletising equipment. A variation of this type of technology is called mass pelletising: polystyrene from suspension polymerisation is re-melted in an extrusion process, further auxiliaries are added; the beads are produced with special pelletising nozzles.

2.4 PRODUCER DESCRIPTION

PlasticsEurope Eco-profiles represent European industry averages within the scope of PlasticsEurope as the issuing trade federation. Hence, they are not attributed to any single producer, but rather to the European plastics industry as represented by PlasticsEurope's membership and the production sites participating in the Eco-profile data collection. The following companies contributed to provide data to this Eco-profile:

- | | |
|---|---|
| <ul style="list-style-type: none">■ BASF SE
Carl Bosch Str. 38
D-67056 Ludwigshafen
Germany
http://www.basf.com | <ul style="list-style-type: none">■ SUNPOR KUNSTSTOFF GmbH
Tiroler Straße 14
3105 St. Poelten
Austria
http://www.sunpor.at |
| <ul style="list-style-type: none">■ BEWiSynbra RAW
Zeedijk 25
4871 NM Etten-Leur
The Netherlands
http://www.bewisynbra.com | <ul style="list-style-type: none">■ SYNTHOS S.A.
ul. Chemików 1
32-600 Oświęcim
Poland
http://www.synthosgroup.com |
| <ul style="list-style-type: none">■ GABRIEL TECHNOLOGIE S.A
1, Rue de Roseaux
B-7331 Baudour (Saint Ghislain)
Belgium
http://www.knauf.fr | <ul style="list-style-type: none">■ UNIPOL HOLLAND BV
Rijnstraat 15-A
5347 KL Oss
The Netherlands
http://www.unipol.nl |

- JACKON GmbH
Tonnenhofstrasse 16
23970 Wismar
Germany
<http://www.jackon.de>

- VERSALIS S.p.A.
Piazza Boldrini, 1
20097 San Donato Milanese (MI)
Italy
<http://www.versalis.eni.com>

- RAVAGO SA
Rue Notre-Dame 16
2240 Luxembourg
Luxembourg
<http://www.ravagoeps.com>

2.5 SYSTEM BOUNDARIES

Plastics Europe Eco-profiles refer to the production of polymers as a cradle-to-gate system (see Figure 1).

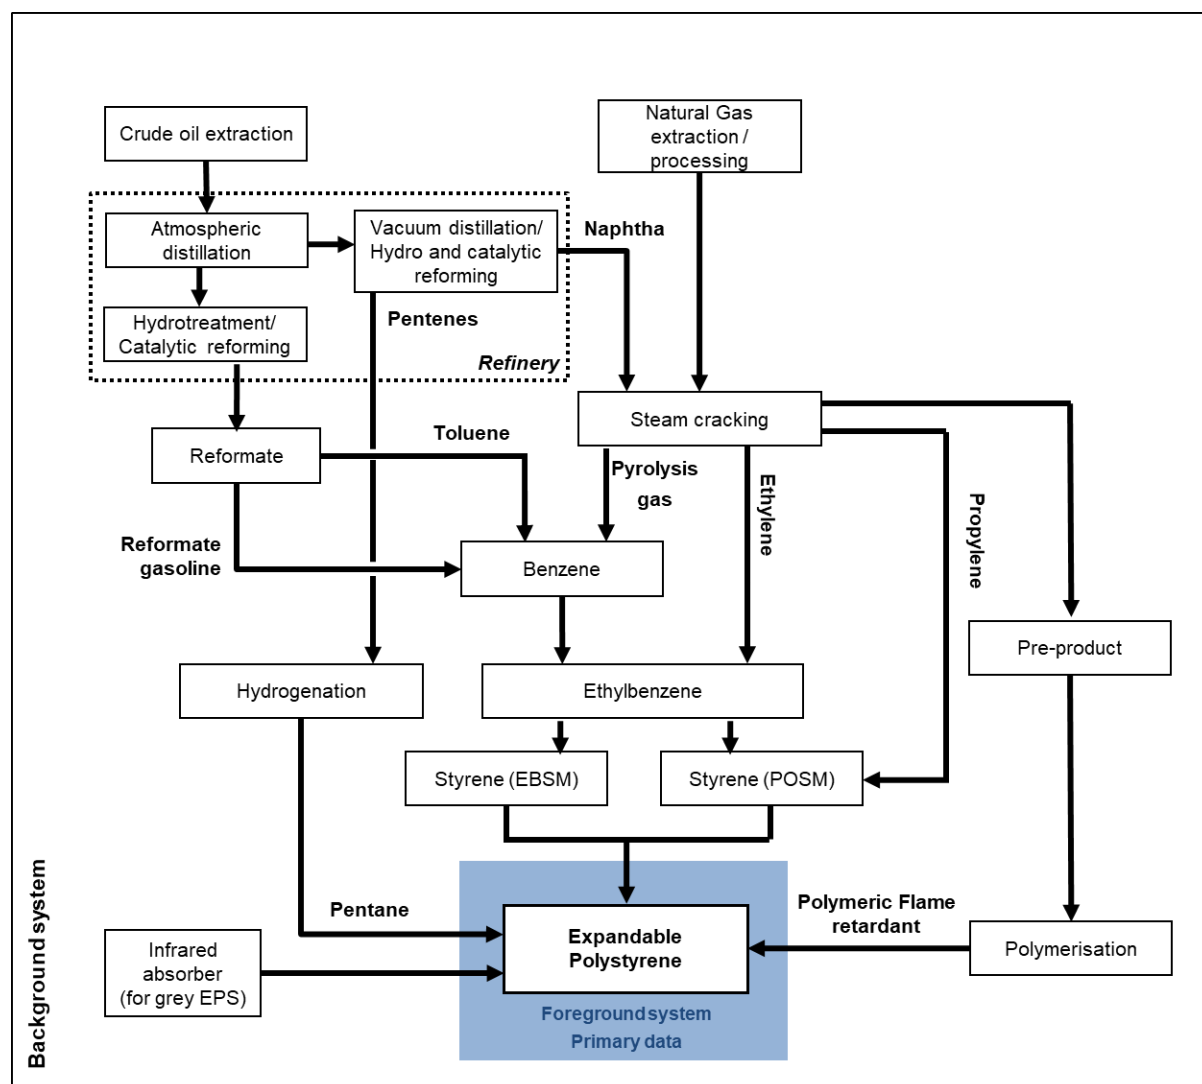


Figure 1 Cradle-to-gate system boundaries (EPS grey and white)

2.6 TECHNOLOGICAL REFERENCE

The production processes are modelled using specific values from primary data collection at site. The main data source is a primary data collection from European producers of EPS, providing site-specific gate-to-gate production data for processes under operational control of the participating companies: nine white EPS beads producers with fifteen plants in eleven different European countries; four grey EPS producers with four plants in four European countries. This covers 77% of the European EPS production volume in 2021 (Research and markets, 2022).

Primary data are used for all foreground processes (under operational control) complemented with secondary data for background processes (under indirect management control). The data for the upstream supply chain until the precursors are taken from the database of the software system GaBi 2021 LCI database (Sphera, 2021).

As shown in Figure 1, two different routes for the production of styrene (EBSM and POSM) are considered. The ethylbenzene styrene monomer (EBSM) process is based on the catalytic dehydrogenation of ethylbenzene and renders styrene as its main product and minor quantity of toluene as co-product. The propylene oxide styrene monomer (POSM) process involves the co-production of propylene oxide and styrene: in this case, ethylbenzene is oxidized to form ethylbenzene hydroperoxide (EBHP). For all styrene-based production processes the styrene LCI developed for PlasticsEurope (2022) has been used. This reflects production route shares of 60:40 between EBSM and POSM.

2.7 TEMPORAL REFERENCE

The LCI data for production is collected as 12-month averages representing the year 2019, to compensate seasonal influence of data. Background datasets used from the GaBi database refer to the year 2020 (in case of raw materials) and 2017 (in case of energy datasets). Available industry data used for the verification of the GaBi datasets refer to the years of 2020 (EBSM) and 2010 (POSM).

The dataset is considered to be valid until substantial technological changes in the production chain occur. The overall reference year for this Eco-profile is 2019 with a recommended temporal validity until 2027 to which the relevance of the revision should be considered according to Eco-profiles program and methodology –PlasticsEurope – V3.1 (2022).

2.8 GEOGRAPHICAL REFERENCE

Primary production data for both grey and white EPS production are from nine different European suppliers each, located in eleven different countries. Whenever applicable (in the majority of the cases), site specific conditions were applied. Only in cases where no further information was available, average European conditions were used for fuel and energy inputs in the system. Therefore, the study results are intended to be applicable within EU boundaries: adjustments might be required if the results were applied to other regions. Grey and white EPS imported into Europe were not considered in this Eco-profile

2.9 CUT-OFF RULES

In the foreground processes all relevant flows are considered, trying to avoid any cut-off of material and energy flows. According to the GaBi 2021 LCI database (Sphera, 2021), used in the background processes, at least 95% of mass and energy of the input and output flows are covered and 98% of their environmental relevance (according to expert judgment) are considered, hence an influence of cut-offs less than 1% on the total is expected.

2.10 DATA QUALITY REQUIREMENTS

Data Sources

Eco-profiles developed by PlasticsEurope use data representative of the respective foreground production process, both in terms of technology and market share. The primary data are derived from site specific information for processes under operational control supplied by the participating member companies of PlasticsEurope (see Producer Description).

All relevant background data such as energy and auxiliary material are also taken from the GaBi 2021 LCI database (Sphera, 2021). Most of the background data used is publicly available and public documentation exists.

Styrene as the relevant intermediate originates from two different technology routes.

EBSM (ethyl benzene styrene monomer) is based on catalytic dehydrogenation of ethylbenzene, with styrene as its main product. The process for POSM (propylene oxide-styrene monomer) involves the oxidation of ethylbenzene; the process delivers styrene and propylene oxide.

The current LCI for styrene (mix of EBSM and POSM) from PlasticsEurope has been applied throughout the models.

Relevance and Representativeness

With regard to the goal and scope of this Eco-profile, the collected primary data of foreground processes are of high relevance, i.e. data was sourced from the most important EPS producers in Europe in order to generate a European production average.

The total production of participating companies in this study is 1382 kilotonnes. This represents about 77% of the European EPS production volume of 1800 kilotonnes in 2021 (Research and markets, 2022). It has been assumed that the production capacity of 2021 is also representative of 2019. The selected background data can be regarded as representative for the intended purpose.

The environmental contributions of each process to the overall LCI results are included in the Chapter 'Dominance Analysis'.

Consistency

To ensure consistency only foreground data of the same level of detail and background data from the GaBi 2021 LCI database [SPHERA 2021] were used. While building up the model, cross-checks concerning the plausibility of mass and energy flows were continuously conducted. The methodological framework is consistent throughout the whole model as the same methodological principles are used both in foreground and background system.

Reliability

Data of foreground processes provided directly by producers are predominantly measured. Data of relevant background processes are measured at several sites – alternatively, they are determined from literature data, or estimated for some flows, which usually have been reviewed and checked for its quality (see chapter Data Sources). These secondary data are mainly based on a mix of data related from market studies, industry information, publicly

available statistics and complemented by necessary calculations and estimations based on expert knowledge.

In general, all GaBi background datasets are reviewed internally before adding them to the GaBi dataset pool and undergo annual updates, which not only includes refreshment of background energy mixes but also import mixes of raw materials and process technology and efficiencies once these become known.

Completeness

Primary data used for the gate-to-gate production of EPS cover all related flows in accordance with the above cut-off criteria. In this way all relevant flows are quantified and data is considered complete. The elementary flows covered in the model enable the impact assessment of all selected impact categories. Waste treatment is included in the model, so that only elementary flows cross the system boundaries.

Precision and Accuracy

As the relevant foreground data is primary data, or modelled based on primary information sources of the owners of the technologies, precision is deemed appropriate to the goal and scope. All background data is consistently GaBi professional data with related public documentation.

Reproducibility

All data and information used are either documented in this report or they are available from the processes and process plans designed within the GaBi 10 software. The reproducibility is given for internal use since the models are stored and available in a database. Sub-systems are modelled by 'state of art' technology using data from a publicly available and internationally used database. It is worth noting that for external audiences, it may be the case that full reproducibility in any degree of detail will not be available for confidentiality reasons. However, experienced experts would easily be able to recalculate and reproduce suitable parts of the system as well as key indicators in a certain confidence range.

Data Validation

The data on production collected by the project partners and the data providing companies are validated in an iterative process several times. The collected data are validated using existing data from published sources or expert knowledge.

The background information from the GaBi 2021 LCI database [SPHERA 2021] is updated regularly and validated and benchmarked daily by its various users worldwide.

Life Cycle Model

The study has been performed with the LCA software GaBi 10. The associated database integrates ISO 14040/44 requirements. Due to confidentiality reasons details on software modelling and methods used cannot be shown here. However, in principle the model can be reviewed in detail if the data owners agree. The calculation of grey and white EPS production follows the vertical calculation methodology as far as possible, i.e. that the averaging is done after modelling the specific processes.

A data quality rating (DQR) based on the criteria and calculation rules described in the guide to develop EF (environmental footprint) compliant datasets [Error! Reference source not found.] has been carried out. The DQR considers the following four data quality criteria evaluated for both product systems:

- technological-representativeness (T_{eR}),
- geographical-representativeness (G_R),
- time-representativeness (T_{iR}),
- precision (P).

The overall DQR of the created datasets represents the arithmetic mean of the four data quality criteria presented above according to F.1 [JRC 2020]. Since the DQR calculation applies to company-specific datasets, the DQR of the activity data and direct (foreground) elementary flows shall be assessed, as well as the sub-processes linked to the activity data.

All direct (foreground) elementary flows and datasets that contribute at least 80% of the total LCIA results have been identified. The latter was done using a normalization and weighting process based on the EF 3.0 method through GaBi software. The styrene dataset which is used as precursor has contributed with over 80% to both product system's single score results.

T_{eR} is evaluated at the level of the secondary dataset (styrene) and is scored with two since the styrene dataset represents a European technology mix (horizontal average). T_{iR} is evaluated twice, at the level of activity data and at the level of the secondary dataset (styrene). T_{iR} is scored with one for the secondary dataset since the reference year of the datasets falls within the time validity of the styrene dataset and with two for the activity data since the data is 3 years old with respect to the reference year of the datasets. The mathematical average of the activity data and secondary data set is 1.5 and represents the T_{iR} of the dataset. G_R is evaluated at the level of the secondary data set (styrene) and is scored with one since the styrene dataset represents a European average which is fully representative for the plants that have been considered in the datasets. Precision is evaluated at the level of activity data and is scored with one since the data is measured/calculated and (internally) verified by the company.

The DQR led to the following weighted average result:

Weighted DQRs				
T_{eR}	T_{iR}	G_R	P	DQR of created dataset
2	1.5	1	1	1.4

2.11 CALCULATION RULES

Vertical Averaging

According to the PlasticsEurope methodology vertical averaging should be applied wherever possible. As far as known and available, route specific pre-cursor datasets matching the real supply chain conditions have been used for modelling individual datasets accordingly (Figure 2). However, in the case of the pre-cursor styrene horizontal averaging has been applied (Figure 3).

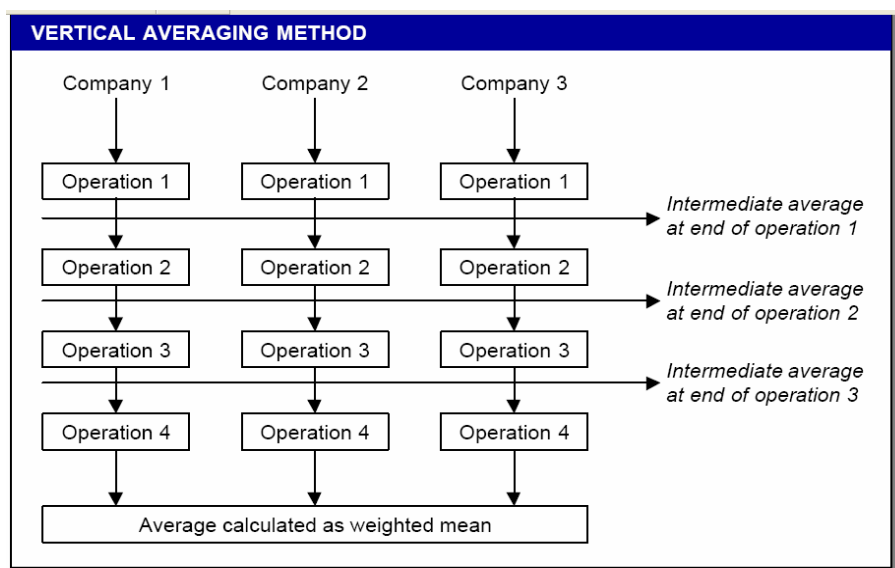


Figure 2 Vertical Averaging

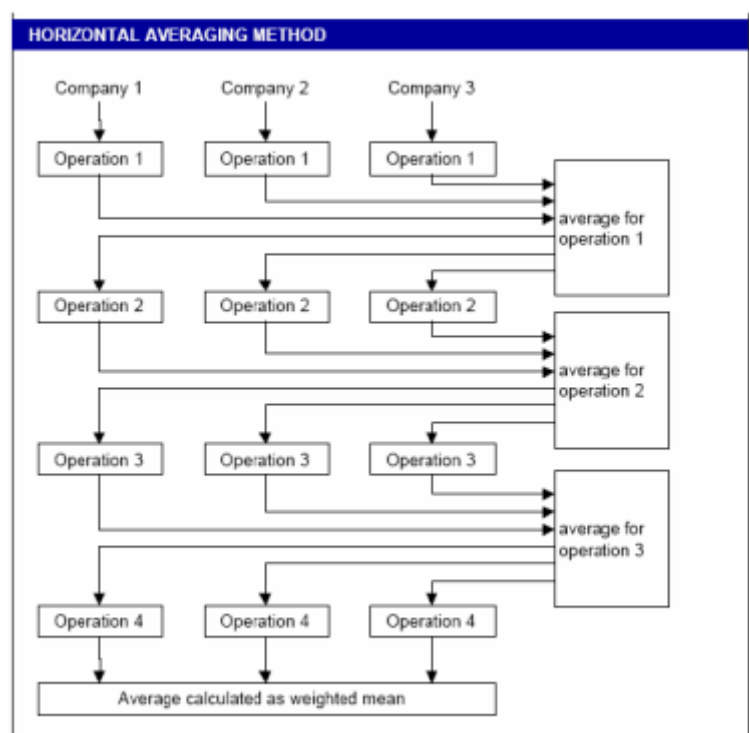


Figure 3 Horizontal Averaging

Allocation Rules

Production processes in chemical and plastics industry are usually multi-functional systems, i.e. they have not one, but several valuable product and co-product outputs. Wherever possible, allocation should be avoided by expanding the system to include the additional functions related to the co-products. Often, however, avoiding allocation is not feasible in technical reality, as alternative stand-alone processes are not existing, or alternative technologies show completely different technical performance and product quality output. In such cases, the aim of allocation is to find a suitable partitioning parameter so that the inputs and outputs of the system can be assigned to the specific product sub-system under consideration.

Foreground system

In some companies' information for white EPS production, output material with deviations from the required specification is reported (about 0.1–0.3%); in case of material declared as off-grade sent to recovery, neither further environmental burden nor credits are given to the modelled system (cut-off).

No post-consumer waste is reported as input to the system, therefore no allocation between different life cycles is necessary.

Background system

In the refinery operations, co-production was addressed by applying allocation based on mass and net calorific value [SPHERA 2021]. The chosen allocation in refinery is based on several sensitivity analyses, which was accompanied by petrochemical experts. The relevance and influence of possible other allocation keys in this context is small. In steam cracking, allocation according to net calorific value is applied. Relevance of other allocation rules (mass) is below 2 %.

2.12 LIFE CYCLE INVENTORY (LCI) RESULTS

Delivery and Formats of LCI Dataset

This eco-profile comprises

- A dataset in ILCD/EF 3.0 format (.xml) (<http://lct.jrc.ec.europa.eu>) according to the last version at the date of publication of the eco-profile and including the reviewer (internal and external) input.
- A dataset in GaBi format (.GaBiDB)
- This report in pdf format.

Energy Demand

The **primary energy demand** (system input) of 90.31 MJ/kg for grey EPS and 85.69 MJ/kg for white EPS indicates the cumulative energy requirements at the resource level, accrued along the entire process chain (system boundaries), quantified as gross calorific value (upper heating value, UHV).

The **energy content in the polymer** indicates a measure of the share of primary energy incorporated in the product, and hence a recovery potential (system output), quantified as the gross calorific value (UHV), is about 42.2 MJ/kg for grey EPS and 42.4 MJ/kg for white EPS.

The difference (Δ) between primary energy input and energy content in the EPS output is a measure of **process energy** which may be either dissipated as waste heat or recovered for use within the system boundaries. Useful energy flows leaving the system boundaries were treated according to the cut-off approach (no credits associated to main product system).

Table 1 Primary energy demand (system boundary level) per 1kg grey EPS

Primary Energy Demand	Value [MJ]
Energy content in polymer (energy recovery potential, quantified as gross calorific value of polymer)	42.20
Process energy (quantified as difference between primary energy demand and energy content of polymer)	48.11
Total primary energy demand	90.31

Table 2 Primary energy demand (system boundary level) per 1kg white EPS

Primary Energy Demand	Value [MJ]
Energy content in polymer (energy recovery potential, quantified as gross calorific value of polymer)	42.40
Process energy (quantified as difference between primary energy demand and energy content of polymer)	43.29
Total primary energy demand	85.69

Water cradle to gate Use and Consumption

The cradle-to-gate water **use** is 2,429.5 kg per 1 kg of grey EPS and 1,854.7 kg per 1 kg of white EPS. The corresponding water **consumption** in the same system boundary is 10.1 kg for grey EPS and 8.1 kg for white EPS.

Water foreground (gate to gate) Use and Consumption

Table 3 and Table 4 show the average values for water use of the EPS production process (gate-to-gate level). For each of the typical water applications the water sources are shown.

Table 3 Water use and source per 1kg of grey EPS (gate-to-gate)

Source	Process water [kg]	Cooling water [kg]	Steam Water [kg]	Water in Raw Materials [kg]	Total [kg]
From Tap	0.20	0.00	0.00	0.00	0.20
Deionized / Softened	0.61	0.00	0.26	0.00	0.87
Untreated (from river/lake)	1.02	12.85	0.00	0.00	13.87
Untreated (from sea)	0.00	0.00	0.00	0.00	0.00
Relooped	0.00	1.21	0.00	0.00	1.21
Totals	1.83	14.07	0.26	0.00	16.16

Table 4 Water use and source per 1kg of white EPS (gate-to-gate)

Source	Process water [kg]	Cooling water [kg]	Steam Water [kg]	Water in Raw Materials [kg]	Total [kg]
From Tap	0.51	0.04	0.01	0.00	0.55
Deionized / Softened	1.26	0.23	0.32	0.00	1.81
Untreated (from river/lake)	0.47	6.27	0.00	0.00	6.73
Untreated (from sea)	0.00	7.17	0.00	0.00	7.17
Relooped	0.00	3.75	0.07	0.00	3.82
Totals	2.23	17.46	0.40	0.00	20.08

Table 5 and Table 6 show the further handling/processing of the water output of the average production processes of grey and white EPS.

Table 5 Treatment of Water Output per 1kg of grey EPS (gate-to-gate)

Treatment	Water Output [kg]
To WWTP	2.47
Untreated (to river/lake)	11.42
Untreated (to sea)	0.00
Relooped	1.32
Water leaving with products	0.00
Water Vapour	0.95
Formed in reaction (to WWTP)	0.00
Totals	16.16

Table 6 Treatment of Water Output per 1kg of white EPS (gate-to-gate)

Treatment	Water Output [kg]
To WWTP	3.62
Untreated (to river/lake)	5.26
Untreated (to sea)	7.17
Relooped	3.87
Water leaving with products	0.00
Water Vapour	0.16
Formed in reaction (to WWTP)	0.00
Totals	20.08

Based on the water use and output figures above the **water consumption (gate-to-gate)** can be calculated as:

Consumption = (water vapour + water lost to the sea) – (water generated by using water containing raw materials + water generated by the reaction + seawater used)

- Grey EPS = 0.95 kg
- White EPS = 0.17 kg

Dominance Analysis

Table 7 and Table 8 present dominance analyses for the production of 1kg grey and 1kg white EPS respectively. In nearly all analysed environmental impact categories (freshwater eutrophication and ozone depletion as exception), the precursors (styrene and other chemicals) contribute to more than 87% of the overall impact.

Styrene shows the highest contribution to most impact categories analysed except for ozone depletion (only applicable for grey EPS).

The group “Other chemicals” covers additives such as pentane, graphite, coke or flame retardant, which also show relevant influence to all impact categories. It needs to be mentioned that pentane and flame retardants have been grouped in the previous eco-profile under “Pre-cursors and Process”. Also, more accurate available data has been selected for graphite and coke in comparison to the previous eco-profile.

Silica and zinc stearate which are used as stabilizer in EPS production are influencing the results for Resource use, minerals and metals significantly.

Electricity and thermal energy of the considered foreground production process do not show a relevant contribution to any impact category except for ozone depletion.

Halogenated emissions to air are causing the effect of ozone depletion. Since the use of certain halogenated substances has been banned following the implementation of the Montreal Protocol, the following emissions are not present anymore in the updated Sphera datasets: Halon (1301), R 11 (trichlorofluoromethane), R 114 (dichlorotetrafluoroethane) and R 12 (dichlorodifluoromethane) and R22 (chlorodifluoromethane). Particularly R22, which has been removed, has the profound effect of reducing the remaining, already greatly reduced ODP impacts by several orders of magnitude for most datasets. This consequently further reduces the impact results for ODP for many datasets in the database. The halogenated emissions to air are accumulating from all used background processes without a specific dominance in a category. Significant contributions to the ODP result come mainly from styrene, electricity, graphite (captured in the category “other chemicals”) and utilities.

Phosphorous emissions from waste water treatment plants are relevant with regards to fresh water eutrophication.

Pentane emissions to air resulting as direct process emissions (these are captured in category “production”) contribute to photochemical ozone formation.

Transports show the least significance (0 – 1%) of all groupings to the overall impact of both datasets.

Styrene contributes much less to ozone depletion in the grey EPS production than in the white EPS production. The grouping “other chemicals” shows higher relative contributions for the grey EPS than the white EPS except for resource use (minerals & metals). Process waste treatment (i.e. waste water treatment) shows a higher relative contribution for white EPS than grey EPS.

Table 7 Dominance analysis of impacts per 1kg grey EPS

[illegible]

Table 8 Dominance analysis of impacts per 1kg white EPS

[illegible]

Comparison of the present Eco-profile with its previous version

The previous EPS Eco-profile is from 2015 and based on primary data. It must be noted that the scope has changed as new participating companies including new plants are within the scope of the current Eco-profile and some participating companies from the previous Eco-profile are not part of this one. The results presented in Table 9 and Table 10 have been calculated according to the same impact assessment methodology which has been used for the Eco-Profile in 2015. As the results presented in Table 9 and Table 10 have been calculated for separate Eco-profiles of white and grey EPS in 2022, a direct comparison to the Eco-profile from 2015 is not possible.

Some improvements for both Eco-profiles, grey and white, can be observed in the impact categories of acidification, eutrophication, ozone depletion and photochemical ozone formation.

For global warming potential, white EPS shows relevant improvements (8%), grey EPS shows a small increase in potential impacts (7%; compared to a mix of white and grey EPS presented in the previous Eco-profile).

No relevant changes are observed in primary energy demand or abiotic depletion potential, fossil fuels.

The changes in the electricity grid mix over the years, in particular electricity from renewables becoming more relevant, caused improvements in all impact categories.

Table 9 Comparison of the present Eco-profile with its previous version per 1 kg grey EPS with old methodology

	Previous, white and grey EPS (2015) CML 2001 (April 2013)	New, grey EPS (2022) CML 2001 (April 2013)	Difference (%)
Environmental Impact Categories			
Gross primary energy from resources [MJ]	85.59	90.31	
Abiotic Depletion Potential (ADP), elements [kg Sb eq.]	1.30E-06	8.30E-07	
Abiotic Depletion Potential (ADP), fossil fuels [MJ]	76.59	79.51	Results not directly comparable due to the difference in the reference flow (product)
Global Warming Potential (GWP) [kg CO ₂ eq.]	2.37	2.53	
Acidification Potential (AP) [g SO ₂ eq.]	6.46	3.52	
Eutrophication Potential (EP) [g PO ₄ ³⁻ eq.]	0.57	0.50	
Ozone Depletion Potential (ODP) [g CFC-11 eq.]	1.84E-07	1.06E-11	
Photochemical Ozone Creation Potential [g Ethene eq.]	1.21	0.74	

Table 10 Comparison of the present Eco-profile with its previous version per 1 kg white EPS with old methodology

	Previous, white and grey EPS (2015) CML 2001 (April 2013)	New, white EPS (2022) CML 2001 (April 2013)	Difference (%)
Environmental Impact Categories			
Gross primary energy from resources [MJ]	85.59	85.69	
Abiotic Depletion Potential (ADP), elements [kg Sb eq.]	1.30E-06	9.14E-07	
Abiotic Depletion Potential (ADP), fossil fuels [MJ]	76.59	76.82	Results not directly comparable due to the difference in the reference flow (product)
Global Warming Potential (GWP) [kg CO ₂ eq.]	2.37	2.18	
Acidification Potential (AP) [g SO ₂ eq.]	6.46	3.14	
Eutrophication Potential (EP) [g PO ₄ ³⁻ eq.]	0.57	0.47	
Ozone Depletion Potential (ODP) [g CFC-11 eq.]	1.84E-07	4.27E-12	
Photochemical Ozone Creation Potential [g Ethene eq.]	1.21	0.98	

3 EF 3.0 INDICATOR RESULTS

The following table shows the LCA results for 1 kg grey and white EPS when applying the EF3.0 impact assessment methodology.

Please note: when importing the delivered LCI dataset in ILCD/EF3.0 (.xml) format only these results can be recovered in the LCA software tool!

Table 11 LCA results for 1 kg grey and white EPS applying EF3.0 impact assessment methodology

Indicator	Unit	Grey EPS	White EPS
Acidification	Mole of H+ eq	4.34E-03	3.92E-03
Climate change, total	kg CO ₂ eq.	2.62E+00	2.28E+00
Climate Change, biogenic	kg CO ₂ eq.	1.15E-02	9.56E-03
Climate Change, fossil	kg CO ₂ eq.	2.61E+00	2.27E+00
Climate Change, land use and land use change	kg CO ₂ eq.	7.84E-04	5.21E-04
Ecotoxicity, freshwater – total	CTUe	3.61E+02	3.76E+02
Ecotoxicity, freshwater inorganics	CTUe	3.64E+01	3.54E+01
Ecotoxicity, freshwater metals	CTUe	3.24E+02	3.40E+02
Ecotoxicity, freshwater organics	CTUe	3.04E-01	3.14E-01
Eutrophication, freshwater	kg P eq	5.58E-06	8.19E-06
Eutrophication, marine	kg N eq.	1.17E-03	1.06E-03
Eutrophication, terrestrial	Mole of N eq.	1.27E-02	1.15E-02
Human toxicity, cancer – total	CTUh	9.13E-10	8.92E-10
Human toxicity, cancer inorganics	CTUh	1.04E-19	7.04E-20
Human toxicity, cancer metals	CTUh	7.42E-10	7.44E-10
Human toxicity, cancer organics	CTUh	1.70E-10	1.49E-10
Human toxicity, noncancer – total	CTUh	4.01E-08	3.99E-08
Human toxicity, noncancer inorganics	CTUh	7.57E-09	6.98E-09
Human toxicity, noncancer metals	CTUh	3.24E-08	3.29E-08
Human toxicity, noncancer organics	CTUh	4.97E-10	4.78E-10
Ionising radiation, human health	kBq U235 eq.	7.35E-02	4.85E-02
Land Use	Pt	2.29E+00	2.18E+00
Ozone depletion	kg CFC-11 eq.	7.91E-15	3.20E-15
Particulate matter	Disease incidences	3.22E-08	3.06E-08
Photochemical ozone formation	kg NMVOC eq	4.89E-03	5.02E-03
Resource use, fossils	MJ	8.08E+01	7.76E+01
Resource use, minerals and metals	kg Sb eq.	4.33E-07	5.44E-07
Water use	m ³ world equiv.	2.18E-01	2.14E-01

4 REVIEW

4.1 REVIEW DETAILS

Commissioned by:	PlasticsEurope
Prepared by:	Maike Horlacher Sphera Solutions GmbH
Reviewed by:	Matthias Schulz Schulz Sustainability Consulting
References:	<ul style="list-style-type: none">• PlasticsEurope (2022): Eco-profiles program and methodology –PlasticsEurope – V3.1 (2022).• ISO 14040 (2018): Environmental Management – Life Cycle Assessment – Principles and Framework• ISO 14044 (2018): Environmental Management – Life Cycle Assessment – Requirements and Guidelines

4.2 REVIEW STATEMENT

According to the PlasticsEurope methodology version 3.1 (2022), a critical review of the Eco-profile report by independent experts should be conducted before publication of the dataset. The outcome of the critical review is reproduced below.

The subject of this critical review was the development of the Eco-profile for Expandable Polystyrene (EPS) in grey and white specification.

The critical review included two iterations of final Eco-profile report review (July and November 2022) in which the reviewer provided comments for clarification by the LCA practitioner. On 21.10.2022, a web-based review meeting was held in which open issues were discussed and spot checks of data, modelling and calculations were carried out. The final version of the report was provided to the reviewer on 28.10.2022. The reviewer checked the implementation of the comments and agreed to conclude the critical review process. The reviewer acknowledges the unrestricted access to all requested information, the dedicated efforts of the practitioner to address comments, as well as the open and constructive dialogue during the entire critical review process. All versions of the documentation (reports and data), including the reviewer's comments, questions and associated answers, are archived and can be made available upon request.

Primary data was collected for fifteen plants from nine white EPS producers in eleven different European countries and for four plants from four grey EPS producers in four different European countries. This equates to a representativeness of approximately 77% of the European EPS production volume in 2021. Data for the key precursor styrene monomer was based on the most recent Eco-profile (PlasticsEurope 2022), in which a split of the

dominant styrene production routes was assumed; i.e. 60:40 dehydrogenation of ethylbenzene (EBSM): propylene oxide styrene monomer (POSM) process.

Allocation in the foreground system was not relevant for this Eco-profile. Co-production of small amounts of off-grade EPS were modelled using the cut-off approach.

All background datasets used for this Eco-profile are described in the report and are considered appropriate for the goal and scope of this study. Besides background data for styrene monomer (see info above), all other background datasets stem from the GaBi database.

The reviewer carried out various plausibility checks of the data and results. In the end, all questions raised were clarified, and the reviewer found the data and results to be credible and without perceivable errors or shortcomings.

The potential environmental impacts for grey and white EPS are quantified using the EF v3.0 methodology, as recommended in the current PlasticsEurope methodology. The contribution analysis shows the predominant influence of styrene monomer for the majority of environmental indicators. Significant contributions to the environmental performance also originate from pentane, graphite (for grey EPS only), coke and flame-retardant use.

This Eco-profile also includes a comparison of the environmental performance with the last version from 2015 (based on data from 2013). It should be noted that in the last Eco-profile aggregated results for white and grey EPS had been calculated. Hence, the direct comparison of results is limited.

The LCA practitioner has demonstrated high levels of competence and experience, with a track record of LCA projects in the chemical and plastics industry. The critical review confirms that this Eco-profile adheres to the rules set forth in the PlasticsEurope's Eco-profiles methodology version 3.1 (2022) and represents best available data for grey and white EPS production in Europe.

5 REFERENCES

- GUINÉE ET AL. 2002 Guinée, J. B., Gorrée, M., Heijungs, R., Huppes, G., Kleijn, R., de Koning, A., . . . Huijbregts, M. (2002). Handbook on life cycle assessment. Operational guide to the ISO standards. Dordrecht: Kluwer.
- ILCD 2010 European Commission (2010): ILCD Handbook – General guide for Life Cycle Assessment (LCA) – Detailed guidance
- IPCC 2007 IPCC, 2007: Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment. Report of the Intergovernmental Panel on Climate Change. [Solomon, S., D. Qin, M. Manning, Z. Chen, M. Marquis, K.B. Averyt, M. Tignor and H.L. Miller (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 996 pp.
- ISO 14040: 2006 ISO 14040 Environmental Management – Life Cycle Assessment – Principles and Framework. Geneva, 2006
- ISO 14044: 2006 ISO 14044 Environmental management – Life cycle assessment – Requirements and guidelines. Geneva, 2006
- JRC 2020 Simone Fazio, Luca Zampori, An De Schryver, Oliver Kusche, Lionel Thellier, Edward Diaconu. Guide for EF compliant data sets, Version 2.0 Luxembourg, 2020, ISBN 978-92-76-17951-1 (online), doi:10.2760/537292 (online), JRC120340.
- PLASTICSEUROPE 2022 Eco-profiles program and methodology PlasticsEurope. Version 3.1, 2022.
- PLASTICSEUROPE 2022 Eco-Profile of Styrene. PlasticsEurope
- RESEARCH AND MARKETS, 2022 Retrieved from Europe Expanded Polystyrene (EPS) Market - Growth, Trends, COVID-19 Impact, and Forecasts (2022 - 2027): <https://www.researchandmarkets.com/reports/4536225/europe-expanded-polystyrene-eps-market#rela2-5205053>
- SPHERA 2021 GaBi LCA Database Documentation, GaBi Solutions, 2021 (<https://www.gabi-software.com/databases/gabi-databases/>)
- ULLMANN 2010 Ullmann's Encyclopedia of Industrial Chemistry, John Wiley & Sons, Inc. , Hoboken / USA, 2010
- WMO 2003 WMO (World Meteorological Organisation), 2003: Scientific assessment of ozone depletion: 2002. Global Ozone Research and Monitoring Project – Report no. 47. Geneva.